
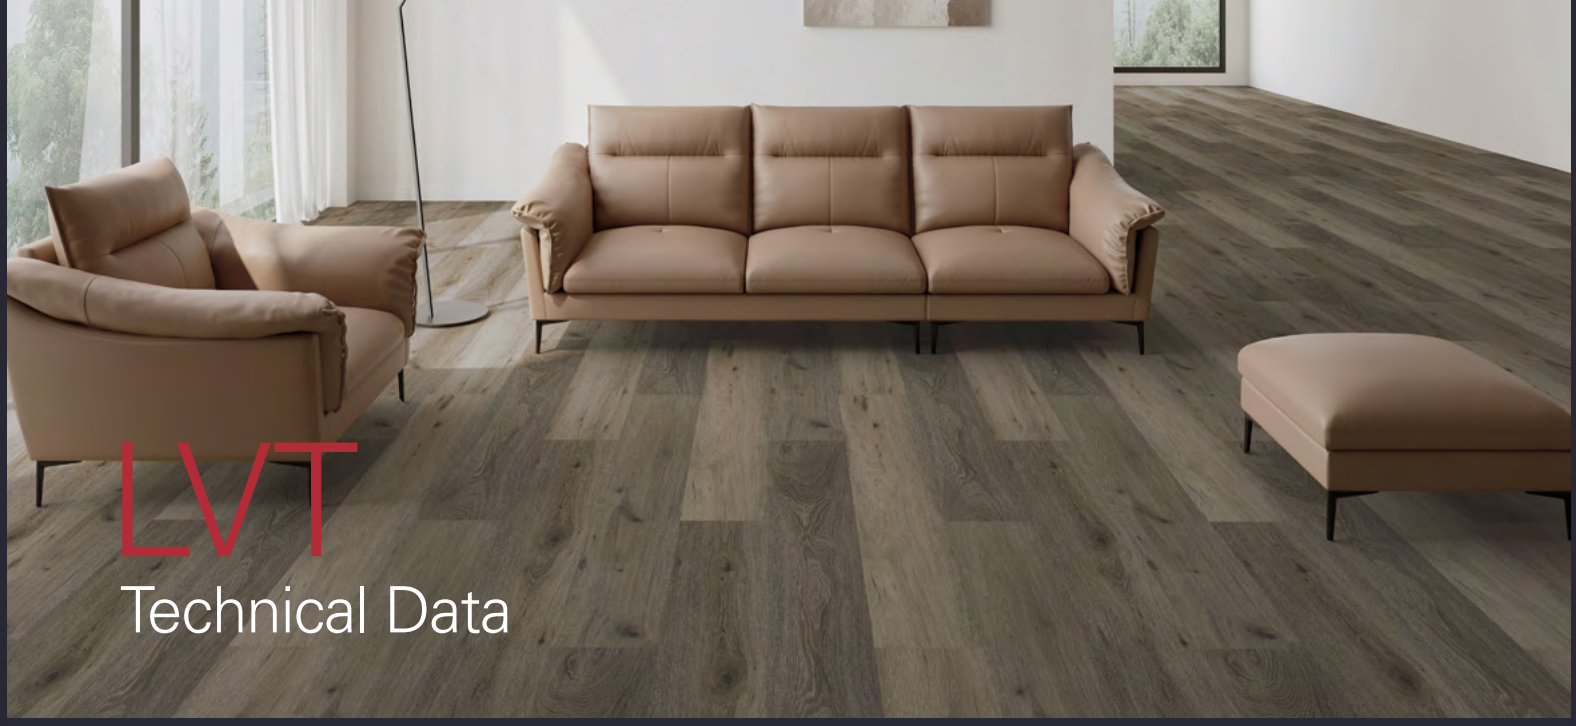


LVT

Technical Data

Available thickness	
Overal thickness	2.0-3.0mm
Classification (ISO 10874)	
Wearlayer	Utility Class
0.2mm	
0.3mm	
0.55mm	

Constructure

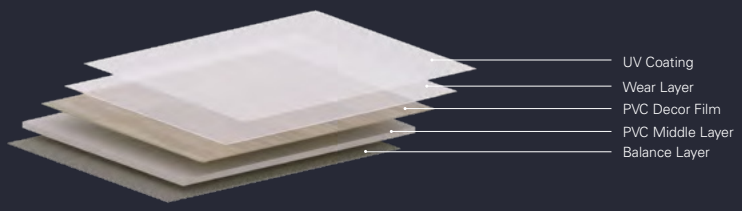

	Property	Test Method Standard	Review in Accordance with Standard
E1 HCHO	Formaldehyde emission	EN 717-1	E1
B_{fl}-s1	Reaction to fire	EN 13501-1	Bfl- s1
R10 RUTSCHHEMMKLASSE	Slip resistance	DIN 51130	R9/R10
DS	Slip resistance	EN 13893	DS
	Wear resistance	EN 660-2	Group T
	Resistance to staining	ISO 26987	Index 0 Not affected
	Light stability	ISO 105-B02	≥6
	Peel resistance	ISO 24345	65 N/50mm
	Flexibility	ISO 24344 Method A	No cracking shown in both directions when tested with a 20mm mandrel
	Burning cigarette test	EN 1399 Method B	Rating 3
	Residual indentation	ISO 24343-1	~ 0,03 mm
	Castor chair	ISO 4918	Pass
	Dimensional stability Curling after exposure to heat	ISO 23999	Dimensional stability: ≤0.15% Curling: ≤0.5mm
	Phthalate content	EN 14372	Pass
	PCP	EN 12673	Pass
A+	VOC emissions	ISO 16000 parts-3,-6,-9, 11	A+
CE	CE	-	Certified
UK CA	UKCA	-	Certified
	EPD	-	Certified
	Floorscore	-	Certified
	Indoor Air Comfort Gold	-	Certified
	TUV Profi Cert.	-	Certified
	Utilization	-	Recyclable