
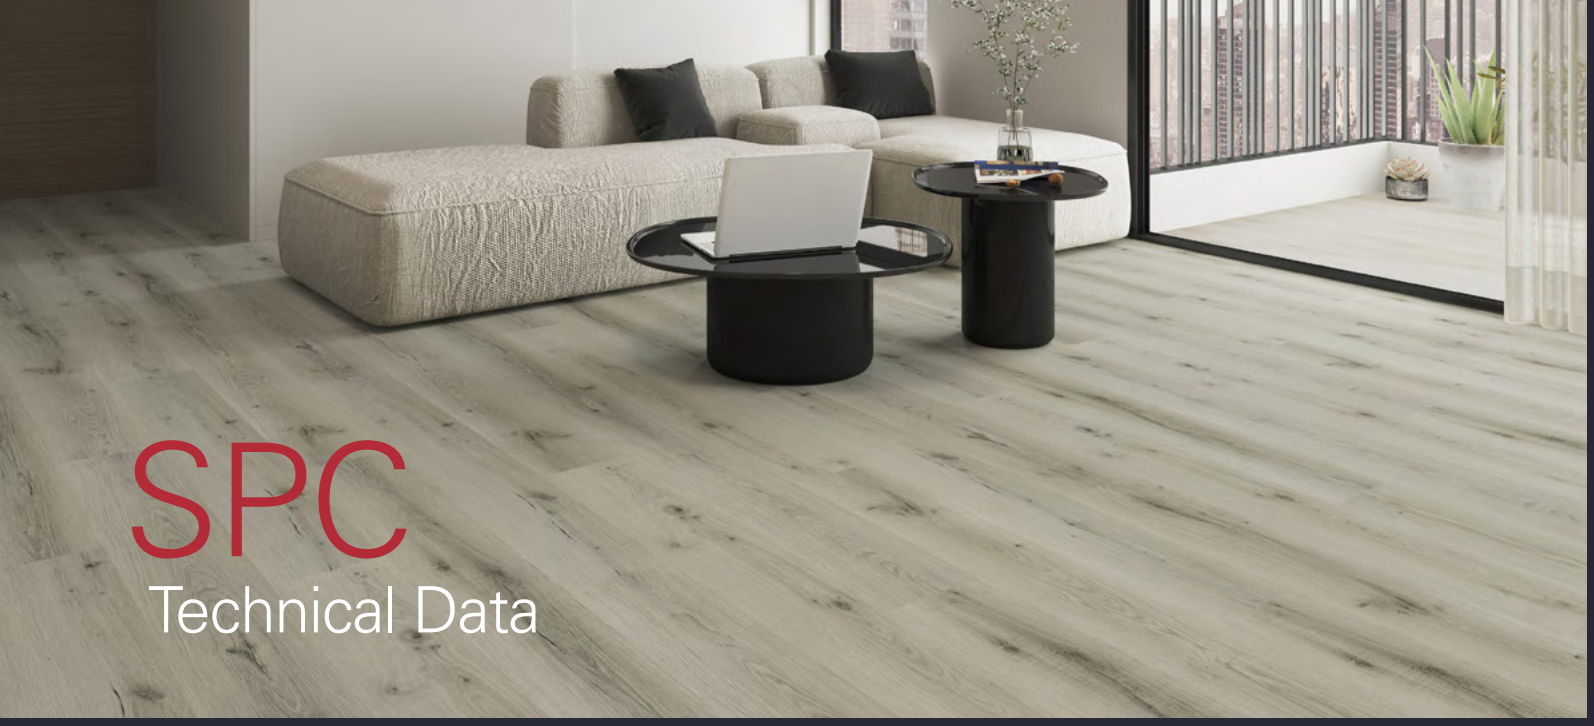


# SPC

## Technical Data

| **Available thickness** | |
|---|---|
| Overal thickness | 3.5-8.0mm |
| **Classification (ISO 10874)** | |
| Wearlayer | Utility Class |
| 0.2mm | |
| 0.3mm | |
| 0.55mm | |

**Constructure**

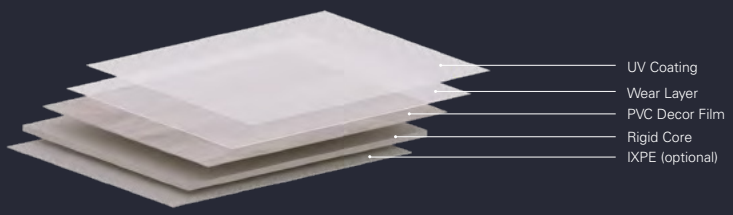


| | Property | Test Method Standard | Review in Accordance with Standard |
|---|---|---|---|
| | UNILIN, VALINGE or I4F CLICK system | - | Simple and fast installation |
| | Formaldehyde emission | EN 717-1 | E1 |
| | Reaction to fire | EN 13501-1 | Bfl- s1 |
| | Slip resistance | DIN 51130 | R9/R10 |
| | Slip resistance | EN 13893 | DS |
| | Wear resistance | EN 660-2 | Group T |
| | Resistance to staining | ISO 26987 | Index 0 Not affected |
| | Light stability | ISO 105-B02 | ≥6 |
| | Residual indentation | ISO 24343-1 | ~ 0,03 mm |
| | Castor chair | ISO 4918 | Pass |
| | Dimensional stability<br>Curling after exposure to heat | ISO 23999 | Dimensional stability: ≤0.1 %<br>Curling: ≤0.5mm |
| | Phthalate content | EN 14372 | Pass |
| | VOC emissions | ISO 16000 parts-3,-6,-9, 11 | A+ |
| | CE | - | Certified |
| | UKCA | - | Certified |
| | Floorscore | - | Certified |
| | Indoor Air Comfort Gold | - | Certified |
| | TUV Profi Cert. | - | Certified |
| | Utilization | - | Recyclable |